



*Lighting*

the way to extraordinary experiences

**LED** Catalogue  
2024




## Brilliance in every light

We believe in exploring ideas that truly enlighten us and change lives. Light has the ability to adapt to any situation, and this has inspired us to bring you light new forms. With each new idea, we offer you an amazing selection of lights that will illuminate your space and transform it into something extraordinary.

# PANEL SERIES

---

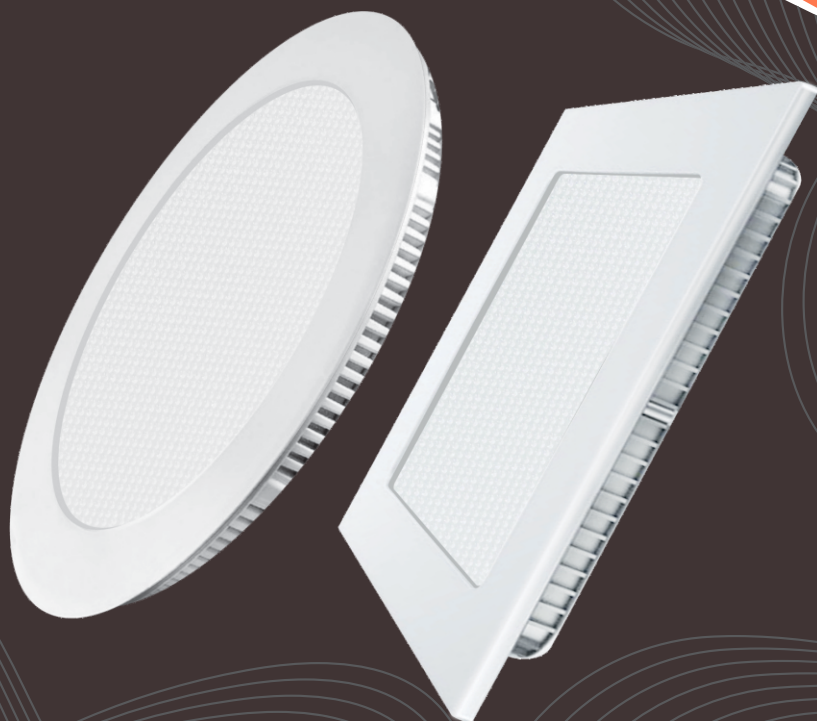

# AL SLIM PANEL WITH DRIVER

## SPECIFICATION

CCT	6500K, 4000K, 3000K, 3 IN 1
LUMENS	80LM/W
USAGE	RESIDENTIAL, FACTORIES, SCHOOL, HOSPITALS
WARRANTY	2 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

Wattage	Outer Dimension	Cutout Dimension
3W RD SQ	Ø 85X22   90X90	Ø 70   75X75
6-8W RD SQ	Ø 120X22   122X122X22	Ø 105   105X105
9W RD SQ	Ø 145X22   124X145X22	Ø 130   130X130
12-15W RD SQ	Ø 171X22   173X173X22	Ø 160   160X160
18W RD SQ	Ø 198X22   198X198X23	Ø 185   185X185
22W RD SQ	Ø 224X22   22XX224X22	Ø 210   210X210

# AL SURFACE PANEL WITH DRIVER

## SPECIFICATION

CCT	6500K, 4000K, 3000K
LUMENS	80LM/W
USAGE	RESIDENTIAL, FACTORIES, SCHOOL, HOSPITALS
WARRANTY	2 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
6-8W SF RD   SQ	Ø 120X36   120X120X36	NA
12-15W SF RD   SQ	Ø 175X36   173X173X36	NA
18-22W SF RD   SQ	Ø 220X33   220X220X36	NA



## AL DOUBLE COLOUR PANEL

### SPECIFICATION

CCT	WHITE + PINK/GREEN/BLUE/PGB
LUMENS	80LM/W
USAGE	RESIDENTIAL, FACTORIES, SCHOOL, HOSPITALS
WARRANTY	2 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
3+3W RD   SQ	Ø 105X23   105X105X23	Ø 90   85X85
6+3W RD   SQ	Ø 145X23   145X145X23	Ø 125   125X125
12+4W RD   SQ	Ø 195X23   195X195X23	Ø 180   180X180



# AL DOUBLE COLOUR SURFACE PANEL

## SPECIFICATION

CCT	WHITE + PINK/GREEN/BLUE/PGB
LUMENS	80LM/W
USAGE	RESIDENTIAL, FACTORIES, SCHOOL, HOSPITALS
WARRANTY	2 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
3+3W RD   SQ	∅ 106X34   106X106X34	NA
6+3W RD   SQ	∅ 147X34   147X147X34	NA
12+4W RD   SQ	∅ 196X34   196X196X34	NA



## PC DOWNLIGHT / BACKLIT PANEL

### SPECIFICATION

CCT	6500K, 4000K, 3000K, 3 IN 1
LUMENS	100LM/W
USAGE	RESIDENTIAL, FACTORIES, SCHOOL, HOSPITALS
WARRANTY	2 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	INCH	OUTER DIMENSION	CUTOUT DIMENSION
8W PC RD   SQ	4"	Ø 115X35   115X115X35	Ø 105   105X105
15W PC RD   SQ	5"	Ø 144X35   144X144X35	Ø 130   130X130
18-22W PC RD SQ	6"	Ø 166X35   166X166X35	Ø 153   153X153
15W 3 IN 1 RD SQ	6"	Ø 166X35   166X166X35	Ø 153   153X153
22 W PC RD SQ	8"		








## PC PANEL EDGELIT

### SPECIFICATION

CCT	6500K, 4000K, 3000K, 3 IN 1
LUMENS	100LM/W
USAGE	RESIDENTIAL, FACTORIES, SCHOOL, HOSPITALS
WARRANTY	2 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
6-8W PC RD SQ	Ø 120X30   120X120X30	Ø 110   110X110
12-15W PC RD SQ	Ø 170X30   170X170X30	Ø 160   160X160
18-20W PC RD SQ	Ø 200X30   200X200X350	Ø 190   190X190

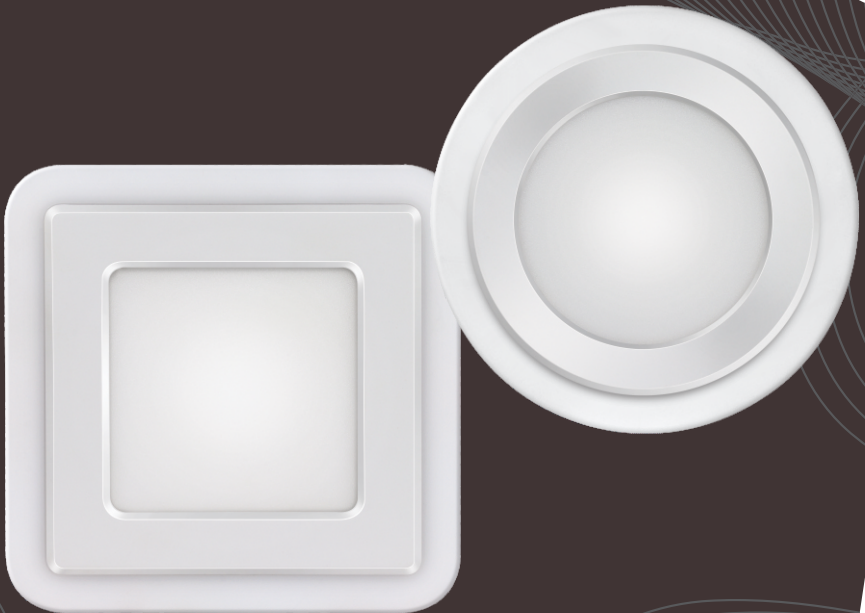

## DOUBLE COLOUR INBUILT PC PANEL

### SPECIFICATION

CCT	WHITE + PINK/GREEN/BLUE/PGB
LUMENS	80LM/W
USAGE	RESIDENTIAL, FACTORIES, SCHOOL, HOSPITALS
WARRANTY	2 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
6+3 INBUILT PC RD   SQ PANEL	Ø147X30   147X147X30	Ø110   110X110
12+4 INBUILT PC RD   SQ PANEL	Ø196X30   197X197X30	Ø160   155X155



## DOB SURFACE PANEL

### SPECIFICATION

CCT	6500K, 4000K, 3000K
LUMENS	80LM/W
USAGE	RESIDENTIAL, FACTORIES, SCHOOL, HOSPITALS
WARRANTY	2 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	INCH	OUTER DIMENSION
6-8W DOB SF RD   SQ	3.5"	Ø90X27   90X90X27
12-15W DOB SF RD   SQ	4.5"	Ø120X27   120X120X27
18-20W DOB SF RD   SQ	6"	Ø156X27   156X156X27

# LED BULB SERIES

---

## INVERTER BULB

### SPECIFICATION

PARAMETERS	SPEC.
HOUSING	A70
WATTAGE RANGE	9W
CCT	6500K
AC LUMEN	900
DC LUMEN	300
USAGE	INDOOR , IP 20
WARRANTY	1 YEARS
MOUNTINIG	B22
BACKUP	UPTO 4 HRS.
HIGH VOLTAGE	440V
SURGE	4KV



## LED DOB BULB

### SPECIFICATION



PARAMETERS	SPEC.	SPEC.
HOUSING	A60	A65
WATTAGE RANGE	9W	12W
CCT	6500K	6500K
AC LUMEN	900	1200
USAGE	INDOOR , IP 20	INDOOR , IP 20
WARRANTY	1 YEARS	1 YEARS
MOUNTINIG	B22	B22
HIGH VOLTAGE	440V	440V
SURGE	4KV	4KV



## HIGH WATTAGE DOB BULB

### SPECIFICATION

PARAMETERS	SPEC.
WATTAGE RANGE	20W, 30W, 40W & 50W
CCT	6500K, 3000K
LUMENS	100LM/W
MOUNTING	B22
USAGE	INDOOR, OUTDOOR
WARRANTY	1 YEAR
HIGH VOLTAGE	PHASE TO PHASE 15 MIN.
SURGE	4KV

**LED FLOOD LIGHT**

---



## LED FLOOD LIGHT (GLASS)

### SPECIFICATION



PARAMETERS	SPEC.
WATTAGE RANGE	30W, 50W, 100W, 150W & 200W
CCT	6500K, 3000K
LUMENS	100LM/W
MOUNTING	BRACKET MOUNTING
USAGE	OUTDOOR
WARRANTY	2 YEAR
BEAM ANGLE	120°
LED	2835
HIGH VOLTAGE	440 VAC
SURGE	6KV
IP	IP 66

## LED MINI FLOOD LIGHT (GLASS)

### SPECIFICATION



PARAMETERS	SPEC.
WATTAGE RANGE	50W, 100W
CCT	6500K, 3000K
LUMENS	100LM/W
MOUNTING	BRACKET MOUNTING
WARRANTY	2 YEAR
USAGE	OUTDOOR
BEAM ANGLE	120°
LED	2835
HIGH VOLTAGE	440 VAC
SURGE	6KV
IP	IP 66

## LED FLOOD LIGHT DOB & DRIVER

### SPECIFICATION



PARAMETERS	SPEC.
WATTAGE RANGE	30W, 50W, 100W, 150W & 200W
CCT	6500K, 3000K
LUMENS	100LM/W
MOUNTING	POLE MOUNTING
USAGE	OUTDOOR
WARRANTY	2 YEAR
BEAM ANGLE	120°
LED	2835
HIGH VOLTAGE	440 VAC
SURGE	6KV
IP	IP 66

**LED STREET LIGHT**

---

## OVAL STREET LIGHT



### SPECIFICATION

PARAMETERS	SPEC.
WATTAGE RANGE	24W, 36W, 50W, 100W
CCT	6500K
LUMENS	140LM/W
MOUNTING	POLE MOUNTING
WARRANTY	2 YEAR
USAGE	OUTDOOR
LED	2835
HIGH VOLTAGE	440 VAC
SURGE	6KV
IP	IP 65



## LENSE STREET LIGHT

### SPECIFICATION

PARAMETERS	SPEC.
WATTAGE RANGE	20W, 30W, 50W, 100W
CCT	6500K
LUMENS	140LM/W
MOUNTING	POLE MOUNTING
WARRANTY	2 YEAR
USAGE	OUTDOOR
LED	2835
HIGH VOLTAGE	440 VAC
SURGE	6KV
IP	IP 65

**LED BULKHEAD**

---

## LED BULKHEAD

### SPECIFICATION

PARAMETERS	SPEC.
WATTAGE RANGE	10W & 20W
CCT	6500K, 4000K, 3000K
LUMENS	100LM/W
MOUNTING	WALL MOUNTING
WARRANTY	1 YEAR
LED	2835
HIGH VOLTAGE	220-240 VAC
SURGE	2.5KV
IP	IP 54






**LED BATTEN**

A horizontal bar with a gradient from dark orange to light orange, positioned below the text.

## LED T5 BATTEN

### SPECIFICATION

PARAMETERS	SPEC.
WATTAGE	10W, 18W, 20W, 22W, 24W
SIZE	29MM, 32MM
CCT	6500K, 4000K, 3000K
LUMENS	100LM/W
WARRANTY	1 YEAR
MOUNTING	WALL MOUNTING
USAGE	INDOOR
HIGH VOLTAGE	220-240 VAC
SURGE	4KV

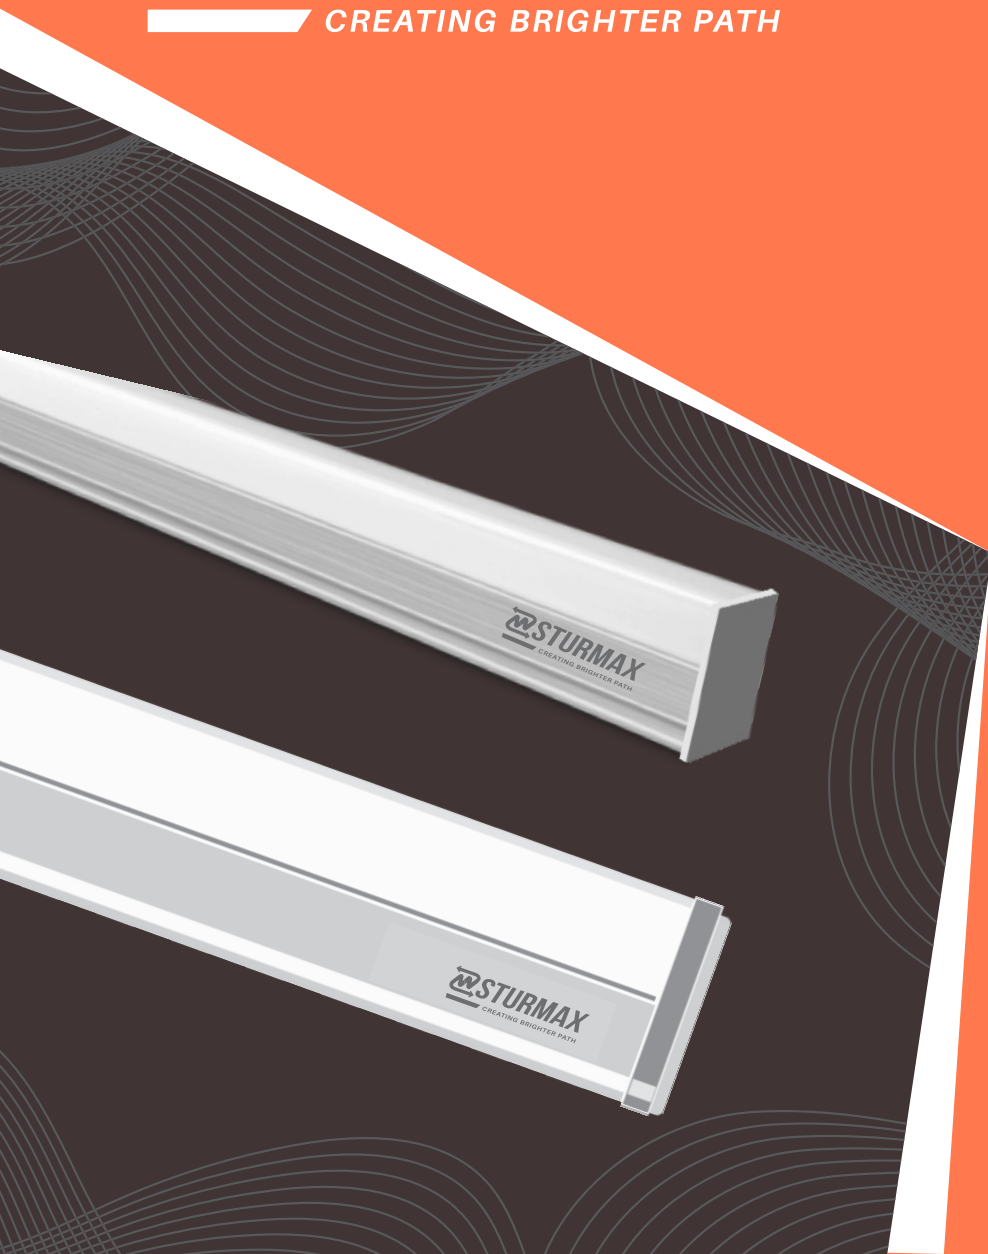



# LED AL T8 BATTEN ANODISED

## SPECIFICATION

PARAMETERS	SPEC.
WATTAGE	36W, 40W
CCT	6500K, 4000K, 3000K
LUMENS	100LM/W
WARRANTY	1 YEAR
MOUNTING	WALL MOUNTING
USAGE	INDOOR
HIGH VOLTAGE	220-240 VAC
SURGE	4KV






## LED AL T8 PC BATTEN MUSHROOM

### SPECIFICATION

PARAMETERS	SPEC.
WATTAGE	36W, 40W
CCT	6500K, 4000K, 3000K
LUMENS	100LM/W
WARRANTY	1 YEAR
MOUNTING	WALL MOUNTING
USAGE	INDOOR
HIGH VOLTAGE	220-240 VAC
SURGE	4KV

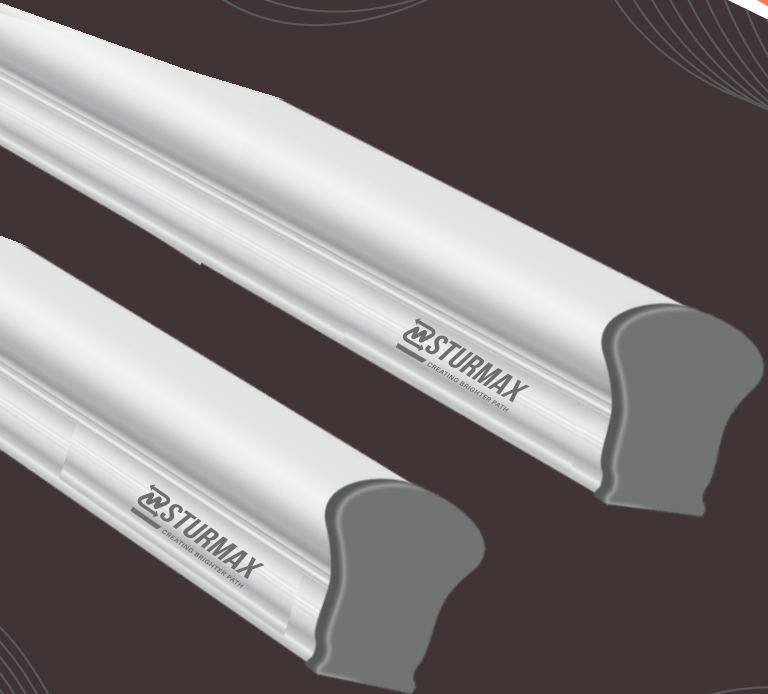


**LED STRIKER**

---



CREATING BRIGHTER PATH

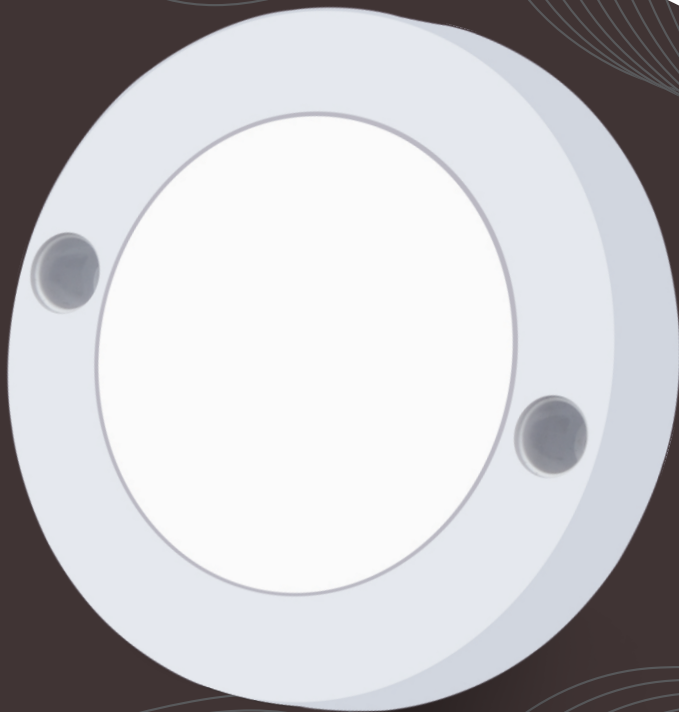

## LED STRIKER

### SPECIFICATION

PARAMETERS	SPEC.
WATTAGE	3W
LUMEN	240LM MAX
VOLTAGE	220-240V, 50HZ
CCT	6500K, 4000K, 3000K, BLUE, RED, GREEN, PINK
WARRANTY	1 YEAR
USAGE	INDOOR, OUTDOOR
RATED CURRENT	10MA
IP	IP 20
CUTOUT	Ø68X14

**LED COB PC**

---

## LED SPOT LIGHT WITH SCREW



### SPECIFICATION

PARAMETERS	SPEC.
WATTAGE	2W
LUMEN	200LM
VOLTAGE	230-240V, 50HZ
CCT	6500K, 4000K, 3000K, BLUE, RED, GREEN, PINK
WARRANTY	1 YEAR
USAGE	INDOOR
SURGE	2KV
IP	IP 20
CUTOUT	Ø42X20   Ø35



# LED MOVABLE COB G-SPIN

## SPECIFICATION

PARAMETERS	SPEC.
CCT	6500K, 3000K, RED, GREEN BLUE, PINK, RBB, WH+WW+NW
LUMENS	3W - 285LM / 7W - 540LM
BEAM ANGLE	36°
USAGE	INDOOR
WARRANTY	1 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
3W	Ø 70X36	Ø 55
7W	Ø 95X47	Ø 75



## DOB JUNCTION

### SPECIFICATION

PARAMETERS	SPEC.
CCT	6500K, 4000K, 3000K, RED, GREEN BLUE, PINK 3IN1
LUMENS	80LM/W
USAGE	INDOOR
WARRANTY	1 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
3W	Ø 81X 32	Ø 60
3W FIX DOB	Ø 80X35	Ø 45
5W	Ø 108X26	Ø 70
7W	Ø 114x48	Ø 80



# MOON JUNCTION

## SPECIFICATION

PARAMETERS	SPEC.
CCT	6500K, 4000K, 3000K, RED, GREEN BLUE, PINK 3IN1
LUMENS	80LM/W
USAGE	INDOOR
WARRANTY	1 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
8W	Ø 84X 68	Ø 50
15W	Ø 140X65	Ø 55




# SURFACE MOON JUNCTION

## SPECIFICATION

PARAMETERS	SPEC.
CCT	6500K, 4000K, 3000K, RED, GREEN BLUE, PINK
LUMENS	100LM/W
USAGE	INDOOR
WARRANTY	1 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
8W SF	Ø 87X45	NA
8W SF 3 IN 1	Ø 87X45	NA
15W SF	Ø 143X45	NA
15 SF 3 IN 1	Ø 143X45	NA



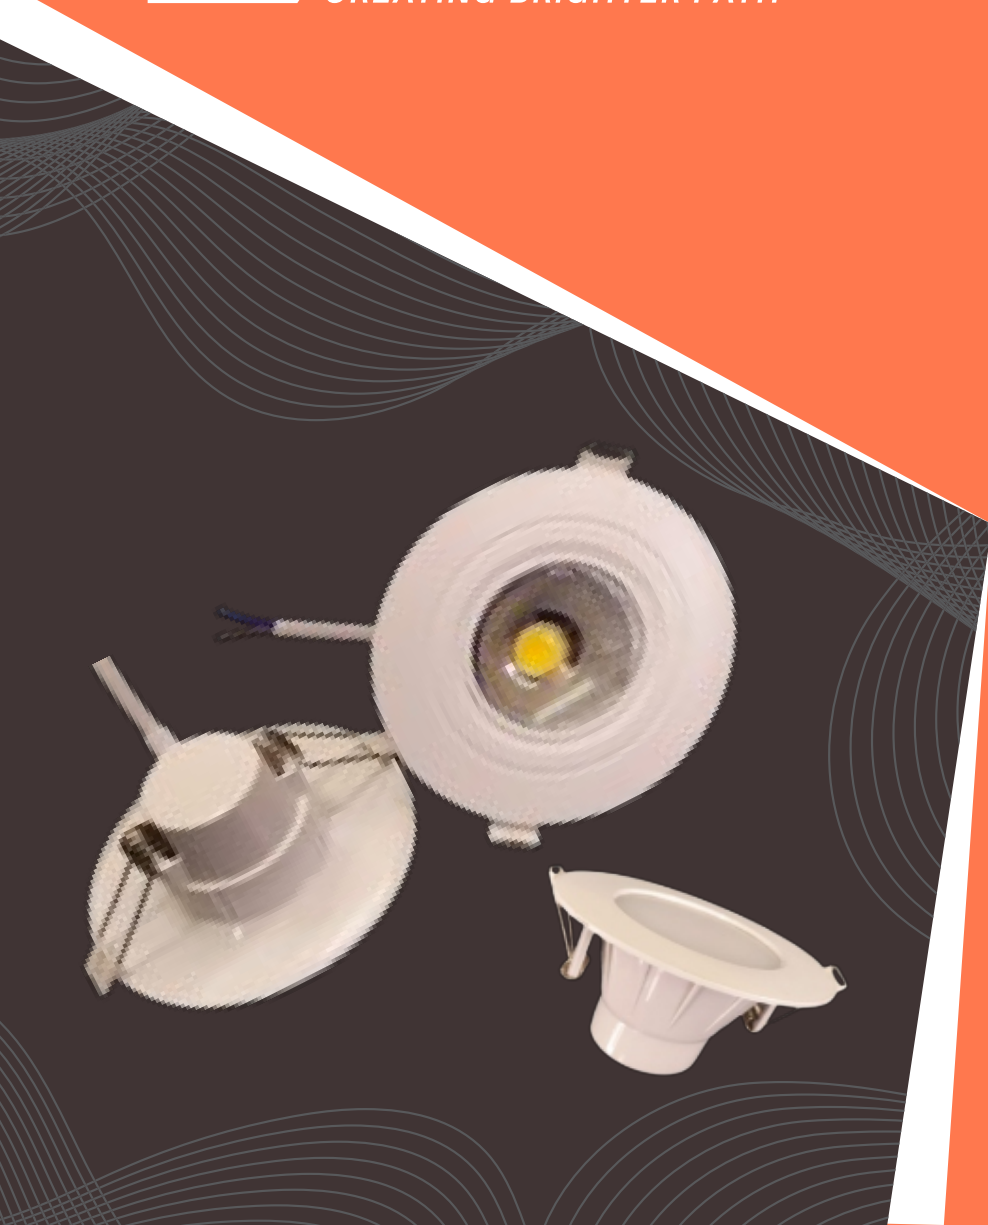

# FIX JUNUCTION

## SPECIFICATION

PARAMETERS	SPEC.
CCT	6500K, 4000K, 3000K, RED, GREEN BLUE, PINK
LUMENS	100LM/W
USAGE	INDOOR
WARRANTY	1 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
3W	Ø 80X35	Ø 45
9W	Ø 108X60	Ø 85



## PC JUNUCTION COB

### SPECIFICATION

PARAMETERS	SPEC.
CCT	6500K, 4000K, 3000K, RED, GREEN BLUE, PINK
LUMENS	100LM/W
USAGE	INDOOR
WARRANTY	1 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
3W	Ø 70X36	Ø 55
3W 3IN1	Ø 70X36	Ø 55
7W	Ø 110X48	Ø 75
7W 3 IN 1	Ø 110X48	Ø 75



## DOUBLE COLOUR JUNCTION

### SPECIFICATION

PARAMETERS	SPEC.
CCT	RED,BLUE,PINK + PGB 100LM/W
USAGE	INDOOR
WARRANTY	1 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
8+8W	Ø 88 X 43	Ø 52



## TANGO LED DOWNLIGHT

### SPECIFICATION

PARAMETERS	SPEC.
CCT	ALL COLOURS
LUMENS	70LM/W
USAGE	INDOOR
WARRANTY	1 YEARS
RATED VOLTAGE	230-240VAC, 50HZ
SURGE	4KV

WATTAGE	INCH	OUTER DIMENSION	CUTOUT DIMENSION
12W	4"	Ø 130 X 24	Ø 102



**PREMIUM SERIES**

---

# FIX COB

## SPECIFICATION

PARAMETERS	SPEC.
CCT	Red, Blue, Pink + PGB
Lumens	100LM/W
Usage	Indoor
Warranty	2 YEARS
Rated Voltage	230-240Vac, 50Hz
Surge	4Kv

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
7W	Ø 50.8mm	Ø 63.5mm
12W	Ø 63.5mm	Ø 88.9mm
12W 3 IN 1	Ø 63.5mm	Ø 88.9mm
18W	Ø 63.5mm	Ø 95.25mm





# LENSE COB

## SPECIFICATION

PARAMETERS	SPEC.
CCT	Red,Blue,Pink + PGB
Lumens	100LM/W
Usage	Indoor
Warranty	2 YEARS
Rated Voltage	230-240Vac, 50Hz
Surge	4Kv

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
7W	Ø	Ø
12W	Ø	Ø
18W	Ø	Ø

# SURFACE CYLINDER COB

## SPECIFICATION

PARAMETERS	SPEC.
CCT	Red,Blue,Pink + PGB
Lumens	100LM/W
Usage	Indoor
Warranty	2 YEARS
Rated Voltage	230-240Vac, 50Hz
Surge	4Kv

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
7W	Ø	Ø
12W	Ø	Ø
18W	Ø	Ø



# MOVABLE COB

## SPECIFICATION

PARAMETERS	SPEC.
CCT	Red,Blue,Pink + PGB
Lumens	100LM/W
Usage	Indoor
Warranty	2 YEARS
Rated Voltage	230-240Vac, 50Hz
Surge	4Kv

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
7W	Ø 88.9	Ø 69.85
12W	Ø 88.9	Ø 63.5
18W	Ø 114.3	Ø 88.9
24W	Ø	Ø
30W	Ø 158.75	Ø 127.00
50W	Ø 158.75	Ø 127.00





# TRACK LIGHT

## SPECIFICATION

PARAMETERS	SPEC.
CCT	-
Lumens	100LM/W
Usage	OUTDOOR
Warranty	2 YEARS
Rated Voltage	230-240Vac, 50Hz
Surge	4Kv

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
10W	Ø	Ø
20W	Ø	Ø
30W	Ø	Ø



## AL DOWNLIGHT PANEL

### SPECIFICATION

PARAMETERS	SPEC.
CCT	-
Lumens	100LM/W
Usage	OUTDOOR
Warranty	2 YEARS
Rated Voltage	230-240Vac, 50Hz
Surge	4Kv

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
12W	Ø	Ø
18W	Ø	Ø



## FIX LINEAR COB

### SPECIFICATION

PARAMETERS	SPEC.
CCT	-
Lumens	100LM/W
Usage	OUTDOOR
Warranty	2 YEARS
Rated Voltage	230-240Vac, 50Hz
Surge	4Kv

WATTAGE	OUTER DIMENSION	CUTOUT DIMENSION
7W	Ø	Ø
12W	Ø	Ø